




Vanguard™ 6.5 Gross HP 205 CC

Bore 2.68 in. (68.28 mm)
Stroke 2.20 in. (55.88 mm)
Oil Capacity 20-22 fl. oz. (0.59-0.65 L)



Features:

- Dura-Bore™ cast iron cylinder sleeve for extended life
- Float carburetor for consistent easy starting
- Maintenance-free Magnetron® electronic ignition for quick, dependable starts
- Dual-Clean™ air cleaner pleated paper filter with a foam pre-cleaner ensures maximum protection for extended engine life
- Oil Gard low oil engine shutdown device
- Overhead valve design (OHV) for cooler operation and longer valve life
- Buyer protection package provides three-year commercial limited warranty

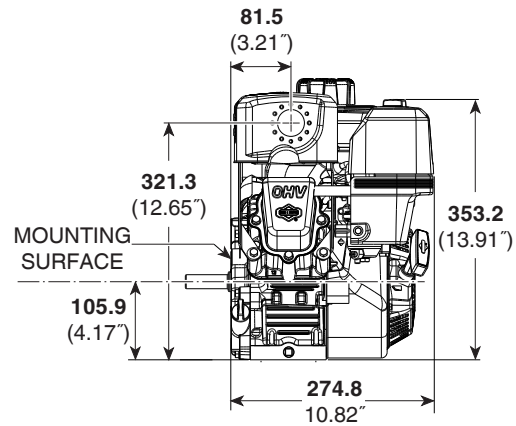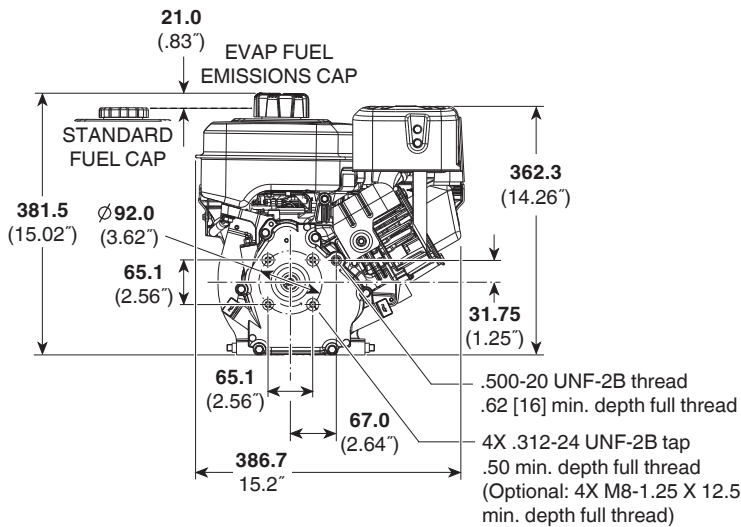

| Model Type | Shipping Weight | Crankshaft | Crankshaft (P.T.O.) Extension | Dimension | Starter Position Bolt-On/Changeable | Oil Filler & Drain | Governor | Controls | Manual Choke | Fuel Tank (Quarts) | Transport Guard™, Fuel/Ignition shut-off | Oil Gard | Flange Mitg. | Top Governor Speed | Notes |
|------------|-----------------|------------|-----------------------------------|------------|-------------------------------------|--------------------|----------|----------|--------------|--------------------|--|----------|--------------|--------------------|-------|
| 13H332 | | | | | | | | | | | | | | | |
| 0036 | 48 | 798532 | 3/4" dia., Keyway, tapped 5/16-24 | 2-27/64(c) | 10.30 | D | M | AG/MF | X | 3.3 | X | X | X | 3600 | • |

• Ball bearing PTO and magneto side